



HIGH-RISE POWER PACKER

The High-Rise Power Packers are the Ideal Solution For:

- Office Developments
- Hotels/Motels
- Hospitals/Nursing Homes
- Restaurants
- Specialty Manufacturing
- High-Rise Chute Rooms
- High-Rise Apartment Complexes

Solid waste in your building has been brought down to street level with a dedicated waste chute and the High-Rise Power Packers.

Compare these features of the High-Rise Power Packers with the competition:

- 25:1 compaction ratio dramatically saving 40-70% on waste hauling bills
- Air Sanitizer cuts down on odor
- Pickup area will be much neater and cleaner
- Very little dedicated space is required in your building
- Higher level of security for your people and tenants
- Cuts down on fire hazards


- Solid waste is collected at the bottom of the chute
- Waste is automatically compacted into an easily removable cube
- Optional 3 phase power available
- Custom applications available, contact for more information

The High-Rise Power Packer, another great idea from Harmony Enterprises...*The Undisputed Leader in Quality Manufacturing.*





High-Rise Power Packer

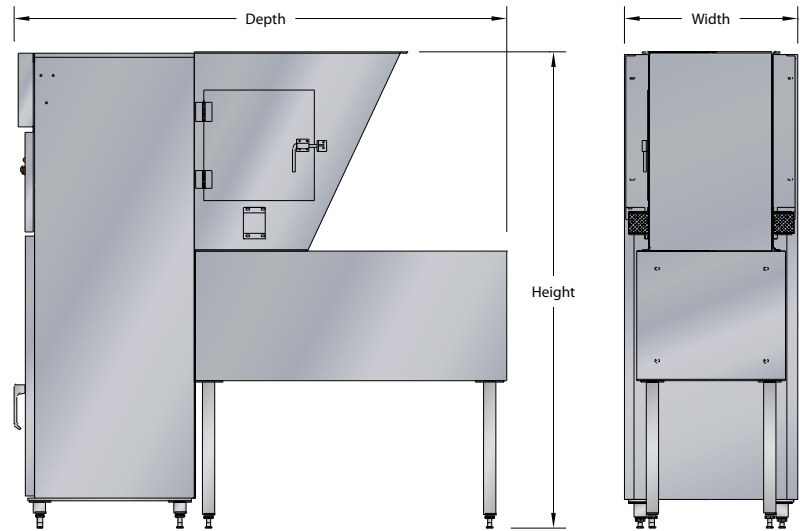

Standard High-Rise Power Packer Features (all models):

- Control panel is UL® listed
- Heavy-duty cylinder
- Locking key switch
- Cube full indicator light and buzzer
- Air sanitizer
- All stainless steel cabinet
- Hydraulic ejector
- Safety door locks
- Swivel locking front casters and optional drip pan available
- Meets or exceeds all ANSI and OSHA safety standards

MODEL	450SSRC	700SSRC
Height	78" (1,981 mm)	78" (1,981 mm)
Width	29" (737 mm)	40" (1,016 mm)
Depth	81" (2,057 mm)	81" (2,057 mm)
Loading Door	24" x 19" (610 mm x 483 mm)	36" x 19" (914 mm x 483 mm)
Access Door (hopper)	17" x 17" (432 mm x 432 mm)	17" x 17" (432 mm x 432 mm)
Cube Capacity	6 cubic feet (170 liters)	9 cubic feet (255 liters)
Reduction Ratio	up to 25:1	up to 25:1
Motor	2 horsepower	2 horsepower
Ram Pressure (vertical)	14,138 lbs. max (6,413 kg)	25,134 lbs. max (11,401 kg)
Ram Pressure (horizontal)	9,818 lbs. max (4,453 kg)	9,818 lbs. max (4,453 kg)
Cycle Time	21 seconds	34 seconds
Cylinder Size (vertical)	3" (76 mm)	4" (102 mm)
Cylinder Size (horizontal)	2.5" (64 mm)	2.5" (64 mm)
Electrical Power	115/230 volt, 1 phase, 60 hz	115/230 volt, 1 phase, 60 hz
Pump	Two-stage	Two-stage
Actual Weight	1,500 lbs. (680 kg)	2,097 lbs. (951 kg)
Full Cube Weight	up to 250 lbs. (113 kg)	up to 350 lbs. (159 kg)
Installation and Operating Area	35 square feet (3.3 square meters)	45 square feet (4.2 square meters)

Specifications subject to change without notice.



Harmony Enterprises, Inc. 704 Main Avenue North Harmony, MN 55939 USA
 1.800.658.2320 toll free | 1.507.886.6666 international | 1.507.886.6706 fax
 Email us at info@harmony1.com or visit us online at www.harmony1.com