

# Stationary Compactors

C75 • C200TC • C200 • C200XHD • C200XP • C300 • C300XHD

## When Your Need Is A Stationary Compactor... Look To The Solid Waste Recycling Leader.

The Stationary Compactor line is ideal for:

- Offices
- Motels/Hotels
- Manufacturing Facilities
- Hospitals
- Chain Stores
- Restaurants
- Department Stores
- Many other Industrial/  
Commercial applications



C200XP Pictured

**Harmony**  
ENTERPRISES, INC.™

704 Main Ave. North • Harmony, MN 55939 USA

Visit our website at: [www.harmony1.com](http://www.harmony1.com) email: [info@harmony1.com](mailto:info@harmony1.com)

**Toll Free: 1.800.658.2320 International: 1.507.886.6666 Fax: 1.507.886.6706**



# Stationary Compactors C75 / C200TC



## Matching The Machine To The Job.

The Model C75 is a full powered space saver, measuring a mere 76 1/2" in length. It saves valuable space on your property. The C75 can even be attached to a roll-off receiver box, or a front loading receiver box. The C200TC, is similar in size and appearance to the C75, and has all the latest in space saving design, comes with the most standard features in the C-Series, and more than any other stationary compactor in the industry. You owe it to yourself to look into these fine products from Harmony Enterprises.



C75 Pictured

MODEL	C75	C200TC
Charge Opening	48" x 32" (1,220mm x 813mm)	60" x 42" (1,524mm x 1,067mm)
Chamber Capacity	.75 Cubic Yards	2 Cubic Yards
Ram Face	47.75" x 24" with 3/8" Plate (1,213mm x 610mm w/ 10mm)	59.75" x 29" with 1/2" Plate (1,518mm x 737mm w/ 13mm)
Floor	3/8" Plate (10mm)	1/2" Plate (13mm)
Sides	3/16" Plate 4" Channels	1/4" Plate 6" Channels
Breaker Bar	6" x 6" x 5/8"	6" x 6" x 5/8" Boxed Angle
Ram Penetration	8" (203mm)	12" (305mm)
Cylinder	Twin 3" (76mm) Bore, 32" (812mm) Stroke	Twin 4" (102mm) Bore, 2.5" (64mm) Rod, 42.25" (1,073mm) Stroke
Ram Force	@ 1,800 - 25,000 Lbs. Max (11,340Kg) (29.5 PSI)	@ 2,000 - 50,265 Lbs. Max (22,800Kg)
Cycle Time	38 Seconds	38 Seconds
Motor	2HP with Single Phase or 2HP with Three Phase	10HP 208/230/460V, TEFC
Pump	5.5 GPM High/Low	12 GPM
Oil Capacity	15 Gallon (57L)	30 Gallon (114L)
Loading Height	43" (1,090mm)	48" (1,219mm)
Overall Height	49" (1,250mm)	55" (1,397mm)
Length	79" (2,010mm)	84" (2,134mm)
Width	58" (1,470mm)	75" (1,905mm)
Shipping Weight	2,900 Lbs. (1,315Kg)	4,350 Lbs. (1,973Kg)
Options	Enclosed Doghouse with Door and Safety Interlock Enclosed Doghouse For Chutes Rear and Side Loading Chutes Security Door and Frame Rear Loading Hopper with 42" Lip, 700 Pound Walk-On Ramp, and Side Rails Remote Control with 13' Cord Reservoir Oil Heater Full Load Indicator Light Jog Control Heavy Duty Turnbuckle Package For Roll-Off Receiver Boxes And Much More (Inquire)	Enclosed Doghouse with Door and Safety Interlock Enclosed Doghouse For Chutes Rear and Side Loading Chutes Security Door and Frame Rear Loading Hopper with 42" Lip, 700 Pound Walk-On Ramp, and Side Rails Remote Control with 13' Cord Reservoir Oil Heater Full Load Indicator Light Jog Control Heavy Duty Turnbuckle Package For Roll-Off Receiver Boxes And Much More (Inquire)

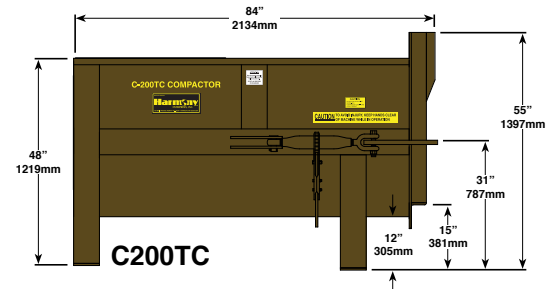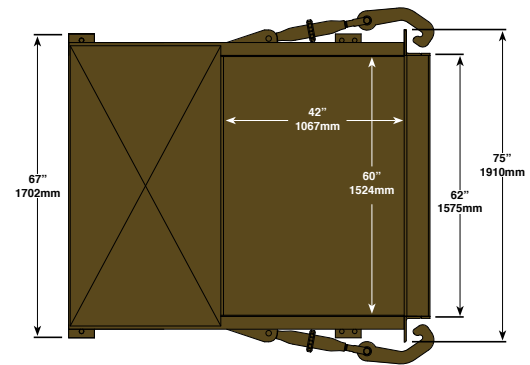

### C200TC STANDARD FEATURES

- PLC Controlled Power Unit
- 80% Full Indicator Light
- 100% Full Indicator Light
- Multi Cycle
- 10 Foot Hydraulic Hoses
- Oil Sight Temperature Gauge
- Key Lock Controls
- Binder and Hooks
- Flexible Conduit Wiring Kit
- Auto Shut Down
- Weather Cover for Power Unit

# Stationary Compactors C200 / C200XHD / C200XP



C200 Pictured

The C200 and the High Density C200XHD are prime examples of what a stationary compactor should be. The rugged, yet versatile C200 series is ideal for many of your stationary compactor needs. From landfills to supermarkets, the C200's are money makers for your waste handling efforts.





The C200 with the optional railing system.

## The C200...

### LIGHT YEARS AHEAD

- Non-Stick Nylatron Ram Guide System
- UL® Listed Control Panel
- Only The Best Allen-Bradley Electrical Components
- All Steel Plate Construction

MODEL	C200	C200XHD	C200XP
Charge Opening	60" x 42" (1,524mm x 1,067mm)	60" x 42" (1,524mm x 1,067mm)	60" x 42" (1,524mm x 1,067mm)
Chamber Capacity	2 Cubic Yards	2 Cubic Yards	2 Cubic Yards
Ram Face	59.75" x 29" with 1/2" Plate (1,518mm x 737mm w/ 13mm)	59.75" x 29" with 1/2" Plate (1,518mm x 737mm w/ 13mm)	59.75" x 29" with 1/2" Plate (1,518mm x 737mm w/ 13mm)
Floor	1/2" Plate (13mm)	1/2" Plate (13mm)	1/2" Plate (13mm)
Sides	1/4" Plate 6" Channels	1/4" Plate 6" Channels	1/4" Plate 6" Channels
Breaker Bar	6" x 6" x 5/8"	6" x 6" x 5/8" Boxed Angle	6" x 6" x 5/8" Boxed Angle
Ram Penetration	12" (305mm)	12" (305mm)	22" (559mm)
Cylinder	5" (127mm) Bore, 54" (1,372mm) Stroke	Twin 5" (127mm) Bore, 54" (1,372mm) Stroke	6" (127mm) Bore, 66" (1,372mm) Stroke
Ram Force	@ 2,400 - 47,000 Lbs. Max (21,318Kg) (27.2 PSI)	@ 2,400 - 94,200 Lbs. Max (42,729Kg) (54 PSI)	@ 2,400 - 67,800 Lbs. Max (30,754Kg) (39.2 PSI)
Cycle Time	38 Seconds	72 Seconds	58 Seconds
Motor	15HP 208/230/460V, TEFC	15HP 208/230/460V, TEFC	15HP 208/230/460V, TEFC
Pump	12 GPM	12 GPM	12 GPM
Oil Capacity	30 Gallon (114L)	60 Gallon (227L)	60 Gallon (227L)
Loading Height	48" (1,219mm)	48" (1,219mm)	48" (1,219mm)
Overall Height	55" (1,397mm)	55" (1,397mm)	55" (1,397mm)
Length	124" (3,150mm)	84" (2,134mm)	143" (3,632mm)
Width	75" (1,905mm)	75" (1,905mm)	75" (1,905mm)
Shipping Weight	4,980 Lbs. (2,260Kg)	5,020 Lbs. (2,277Kg)	5,100 Lbs. (2,313Kg)
Options	Enclosed Doghouse with Door and Safety Interlock Rear and Side Loading Hopper with 42" Lip, Walk-On Ramp, and Railing Remote Control Reservoir Oil Heater Power Unit Weather Cover 10HP Single Phase Motor and Pump Assembly Optional 6" Cylinder (Changes Ram Force To 67,800 Lbs. Max) (39.2 PSI) And Much More (Inquire)	Enclosed Doghouse with Door and Safety Interlock Rear and Side Loading Hopper with 42" Lip, Walk-On Ramp, and Railing Remote Control Reservoir Oil Heater Power Unit Weather Cover 10HP Single Phase Motor and Pump Assembly Optional 6" Cylinder (Changes Ram Force To 67,800 Lbs. Max) (39.2 PSI) And Much More (Inquire)	Enclosed Doghouse with Door and Safety Interlock Enclosed Doghouse For Chutes Side Loading Hopper Rear Loading Hopper with 42" Lip, Railing, and Walk-On Ramp With 18" Extension Remote Control with 13' Cord Reservoir Oil Heater 10HP Single Phase Motor and Pump Assembly

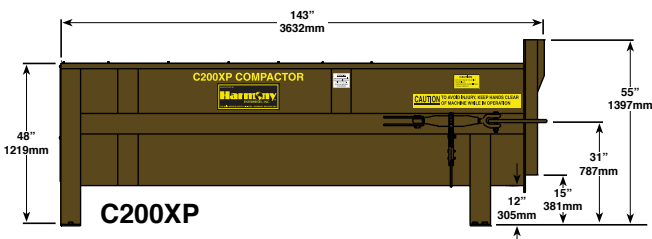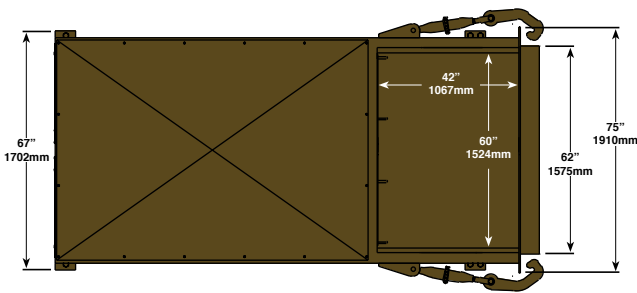

# Stationary Compactors C300 / C300XHD

When your needs are for value, performance, versatility, and reliability, nothing measures up to our Model C300 line. The C300 meets all national electrical codes and the electrical box carries the UL® Label. It leads the industry with features such as: a large 60" x 60" charge opening, 15HP TEFC motor, and a stunning 67,800 lbs. compaction force. It can be configured with different power sources, hoppers, and walk-on ramps. Look to the leaders in solid waste reduction. Look to Harmony Enterprises, Inc.





C300 Pictured

MODEL	C300	C300XHD
Charge Opening	60" x 60" (1,524mm x 1,524mm)	60" x 60" (1,524mm x 1,524mm)
Chamber Capacity	3 Cubic Yards	3 Cubic Yards
Ram Face	59.75" x 29" with 1/2" Plate (1,518mm x 737mm w/ 13mm)	59.75" x 29" with 1/2" Plate (1,518mm x 737mm w/ 13mm)
Floor	1/2" Plate (13mm)	1/2" Plate (13mm)
Sides	1/4" Plate 6" Channels	1/4" Plate 6" Channels
Breaker Bar	6" x 6" x 5/8"	6" x 6" x 5/8"
Ram Penetration	12" (305mm)	12" (305mm)
Cylinder	6" (152mm) Bore, 72" (1,829mm) Stroke	7" (178mm) Bore, 72" (1,829mm) Stroke
Ram Force	@ 2,400 - 67,800 Lbs. Max (30,754Kg) (29.2 PSI)	@ 2,400 - 92,300 Lbs. Max (41,867Kg) (54 PSI)
Cycle Time	60 Seconds	67 Seconds
Motor	15HP 208/230/460V, TEFC	20HP 208/230/460V, TEFC
Pump	12 GPM	16 GPM
Oil Capacity	60 Gallon (227L)	60 Gallon (227L)
Loading Height	48" (1,219mm)	48" (1,219mm)
Overall Height	55" (1,397mm)	55" (1,397mm)
Length	159" (4,040mm)	159" (4,040mm)
Width	75" (1,905mm)	75" (1,905mm)
Shipping Weight	5,300 Lbs. (2,404Kg)	6,000 Lbs. (2,722Kg)
Options	Enclosed Doghouse with Door and Safety Interlock Enclosed Doghouse For Chutes Side Loading Hopper Rear Loading Hopper with 42" Lip, Railing, and Walk-On Ramp With 18" Extension Remote Control with 13' Cord Reservoir Oil Heater Power Unit Weather Cover 10HP Single Phase Motor and Pump Assembly And Much More (Inquire)	Enclosed Doghouse with Door and Safety Interlock Enclosed Doghouse For Chutes Side Loading Hopper Rear Loading Hopper with 42" Lip, Railing, and Walk-On Ramp With 18" Extension Remote Control with 13' Cord Reservoir Oil Heater Power Unit Weather Cover 10HP Single Phase Motor and Pump Assembly And Much More (Inquire)



The C300 shown here with the optional top chute system.

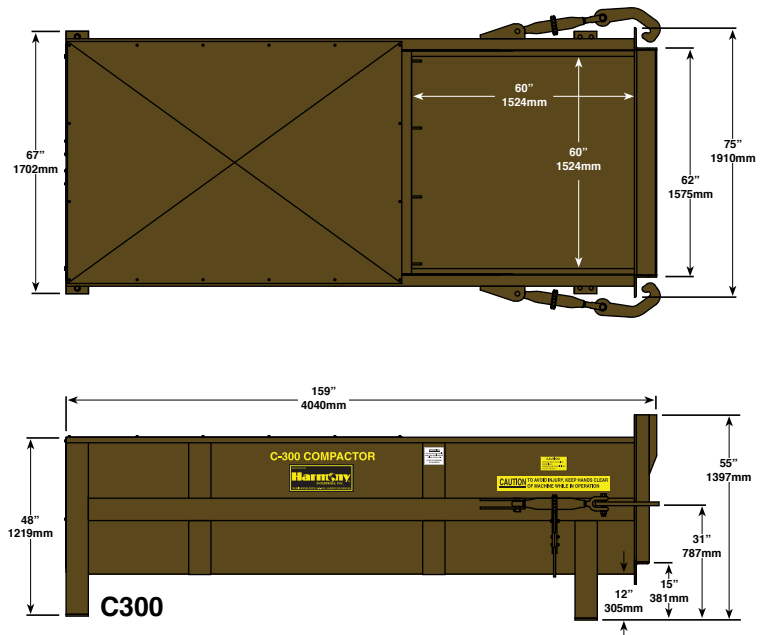

Specifications Are Subject to Change Without Notice  
Form 062509CC