

C36TC

High-Rise System



The C36 High-Rise System is the Ideal Solution For:

- Office Buildings
- Hospitals
- Hotels
- Apartment Buildings

Solid waste in your building has been brought down to street level with the C36 High-Rise System.


Compare these features of the C36 with the competition:

- Cycle times: 29 seconds
- Dramatically lowers waste handling costs with a 10:1 compaction ratio
- 75% reduction in collection and transport frequency
- Reduce pull charges up to 35%
- Less trips to the dumpster
- Higher level of security for **your** people and tenants
- Much lower labor costs

- Neater and cleaner property with fewer fire hazards
- Easy access to manually load solid waste directly into the chamber
- Waste compacted into heavy-duty bags
- Minimal overall footprint requires less floor space for operation
- Optional time saving carts available

The C36 High-Rise System, another great idea from Harmony Enterprises...*The Undisputed Leader in Quality Manufacturing.*



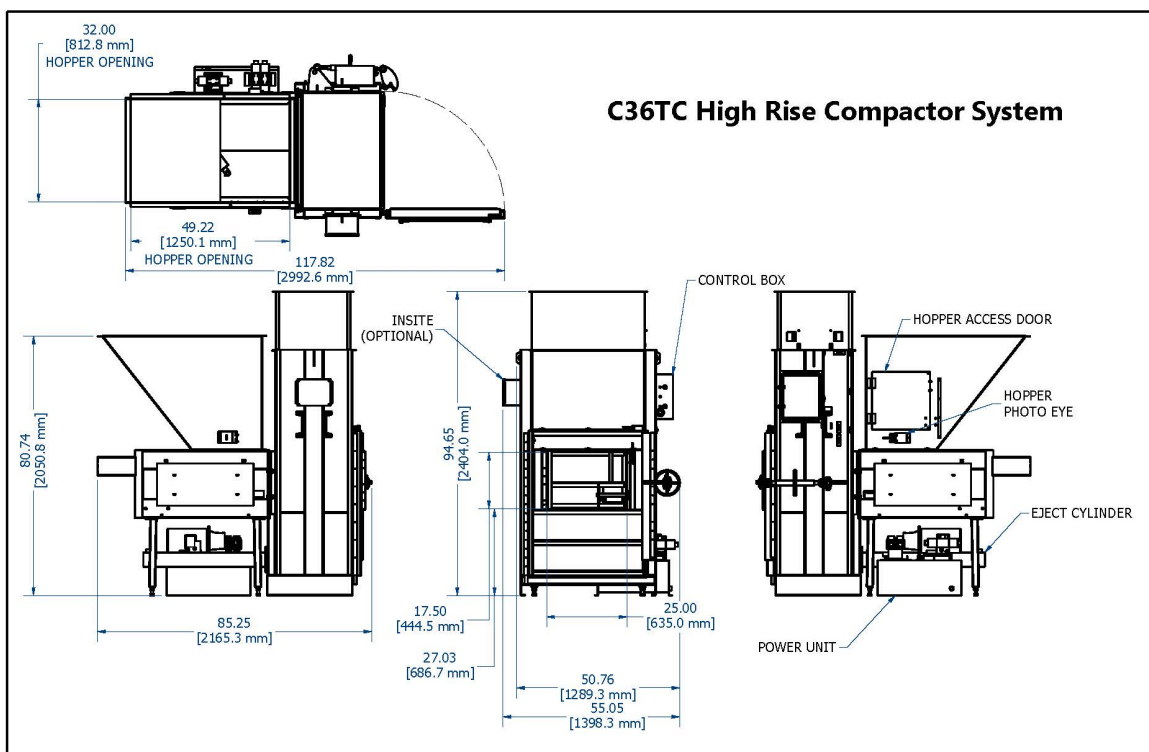

Standard C36 Features:

- Control panel is UL® listed
- 9 cubic feet cube size
- Cube weights up to 350 pounds
- Hydraulic cube eject
- Automatic cube eject system eliminates the physical effort to remove full cubes
- Meets or exceeds all ANSI and OSHA safety standards

Each C36 Compactor has the option of our *Insite* Wireless Monitoring System. This innovative system alerts the janitorial staff when the compactor is partially full, full, does not have a container present or is not turned on, saving you both time and money!

Specifications	C36 TC Compactor
Overall Height	95" (2,413 mm)
Overall Width	55" (1397 mm)
Overall Depth	85" (2159 mm)
Depth with Door Open	118" (2997 mm)
Loading Door Opening	24" x 17" (610 mm x 432 mm)
Charge Opening	22" x 29" (559 mm x 737 mm)
Motor	5 horsepower, TEFC
Main Ram Pressure	31,809 lbs (14,428 kg)
Rear Chute Ram Pressure	35,343 lbs (16,031 kg)
Hydraulic Eject Ram Pressure	14,137 lbs. (6,412 kg)
Cycle Time Main /Rear	19.4 seconds /18 seconds
Main Cylinder	4.5" bore (114 mm) 3" rod (76 mm) 33" stroke (838 mm -twin)
Rear Chute Cylinder	(2x) 3" bore (76 mm) 2" rod (51 mm) 32" stroke (813 mm-twin)
Hydraulic Eject Cylinder	3" bore (76 mm) 2" rod (51 mm) 28.25" stroke (718 mm)
Electrical Power	230 volt, 1 phase, 60 hz
Pump	Two-stage
Shipping Height	76" (1,930 mm)
Shipping Weight	2,220 lbs. (1,007 kg)
Installation and Operating Area	117.82" x 50.76"

Specifications subject to change without notice.



WASTE SOLUTIONS ON A GLOBAL SCALE
Harmony
ENTERPRISES, INC.



Harmony Enterprises, Inc. 704 Main Avenue North Harmony, MN 55939 USA
1.507.886.6666 international | 1.507.886.6706 fax

Email us at info@harmony1.com or visit us online at www.harmony1.com

©2019 Harmony Enterprises, Inc. All rights reserved. Form HEI_C36_US 10/09 SC