



# S60XD

## **Heavy Duty Vertical Baler**

The S60XD Vertical Baler is the Ideal Solution For:

- Recycling Centers
- Transfer Stations
- Super Markets
- Hotels/Motels
- Department Stores
- Manufacturing Facilities
- Colleges/Universities
- · Military Bases
- Industrial/Commercial Sites
- Shopping Centers
- Hospitals

Increase the efficiency of your waste disposal operations and boost your bottom line with Harmony Enterprises'
\$60XDVertical Baler.

Compare these features of the **S60XD** with the competition:

- Fast cycle time reduces your work time
- Heavy-duty 7" cylinder with extra long 64" stroke
- Formidable 92,360 pounds of ram force
- Adjustable Bale Maximizer Timer for excellent bale quality
- Standard retractable bale dogs for maximum material containment

- Standard voltage disconnect included
- Full hinge construction on lower door and latch
- Bale full light and shutoff for consistent bale sizes
- Bale height adjustment selector

The **S60XD** Vertical Baler, another great idea from Harmony Enterprises...*The Undisputed Leader in Quality Manufacturing*.





### **Standard S60XD Features:**

- Complete baler is UL® listed
- Powerful 7" cylinder with extra long 64" stroke
- Standard retractable bale dogs for maximum material containment
- Full hinge construction on lower door and latch
- Enclosed counterbalance for upper door lifting ease
- Six slots for tying bales
- Heavy-duty motor and hydraulics for extra long life
- Meets or exceeds all ANSI and OSHA safety standards














## **S60XD Heavy Duty Vertical Baler**

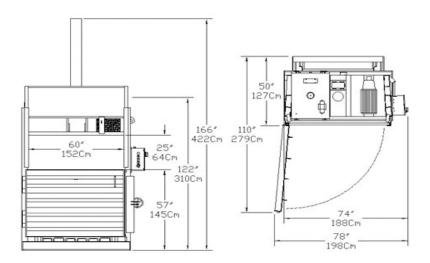

#### **SPECIFICATIONS**

| Bale Size                | 30" x 60" x up to <b>48</b> "<br>( <b>76</b> cm x <b>152</b> cm x <b>122</b> cm) |
|--------------------------|--|
| Bale Weight (corrugated) | up to 1,200 lbs. Corrugated (544 kg)   |
| Ram Pressure             | 92,360 lbs (41,894 Kg)   |
| Cycle Time               | 39 seconds   |
| Cylinder                 | <b>7</b> " bore<br>4. <b>5</b> " rod<br><b>64</b> " stroke                       |
| Motor                    | 20 horsepower, 1,750 rpm, TEFC   |
| Pump                     | 16 gallons per minute  |
| Electrical Power         | 208/230/460 volt, 3 phase, 60 hz   |
| Bale Eject               | Hydraulic  |
| Bale Tying               | Wire or Polyethylene Twine   |

#### **DIMENSIONS**

| Loading Door Opening                             | 25" × 60" (64 x 152cm)                |
|--|---------------------------------------|
| Unloading Door Height                            | 57" (145 cm)                          |
| Overall Height                                   | 166" (422 cm)                         |
| Overall Depth                                    | 50" (127 cm)                          |
| Overall Width                                    | 74" (188 cm)                          |
| Depth with Door Open                             | 97" (246 cm)                          |
| Width with Door Open                             | 78" (198 cm)                          |
| Shipping Height (on side with cylinder extended) | 117" (297 cm)                         |
| Shipping Weight                                  | <b>6,600</b> lbs. (2, <b>994</b> kg)  |
| Installation and<br>Operating Area               | 68.0 square feet (6.32 square meters) |

Specifications subject to change without notice.