

# M30STD

## Vertical Baler



The M30STD Vertical Baler is the Ideal Solution For:

- Convenience Stores
- Office Developments
- Hotels/Motels
- Hospitals/Nursing Homes
- Restaurants
- Department Stores

**See The Video At:**

<https://youtu.be/oiXsZ-qVHOQ>

**When space is a problem, let us bale you out with the powerful M30STD Vertical Baler.**

Compare these features of the M30STD with the competition:

- Small size with incredible strength and durability
- Will handle a variety of materials in the harshest of environments
- Fast 23 second cycle time
- Powerful 3" cylinder with heavy-duty 2" rod for long life
- Energy efficient motor for low operation costs and long life


- Hinged upper-door for extra large feed opening
- Locking or non-locking casters for portable use
- Easy access to motor, pump, and all controls for general maintenance

The M30STD Vertical Baler, another great idea from Harmony Enterprises...*The Undisputed Leader in Quality Manufacturing.*





## M30STD Vertical Baler

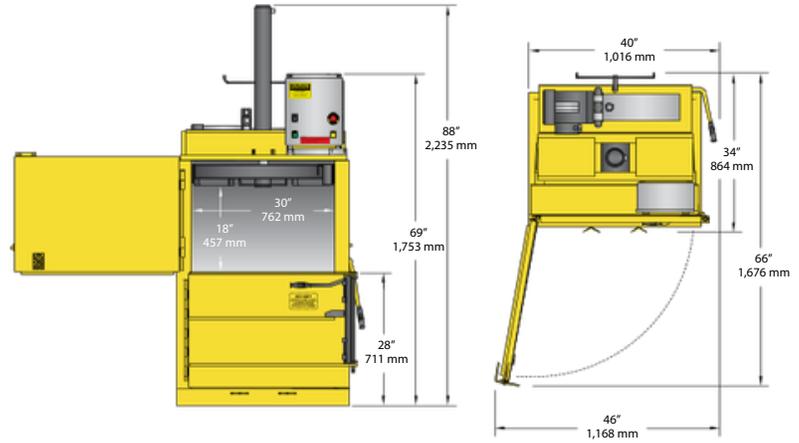

### Standard M30STD Features:

- Control panel is UL® listed
- Manual lever for bale eject
- Space-saving design with small operational footprint
- Heavy-duty and long lasting steel construction
- Energy efficient two stage pump
- Hydraulic valve & special seals that eliminate hydraulic shock
- Easy to access motor, pump, & controls for service
- Meets or exceeds OSHA and ANSI Z245.5 safety standards
- Made In The U.S.A.



MODEL	M30STD
<b>Specifications</b>	
Bale Size	30" x 24" x up to 24" (762 MM x 610 MM x up to 610 MM)
Bale Weight (OCC)	Up to 145 LBS. (66 KG)
Ram Force	14,138 LBS. max (6,413 KG)
Cycle Time	23 Seconds
Electrical Power	208/230/460 Volt, 3 Phase, 60 HZ
Motor	2 HP, 1,725 RPM, TEFC
Cylinder	3" bore (76 MM) 2" rod (51 MM) 32.25" stroke (718 MM)
Pump	Two-Stage
Bale Eject	Manual Lever
Bale Tying	Strapping or Polyethylene Twine
<b>Dimensions</b>	
Loading Door Opening	18"x 30" (457 MM x 762 MM)
Unloading Door Height	28" (711 MM)
Overall Height	88" (2,235 MM)
Overall Depth	34" (864 MM)
Overall Width	40" (1,016 MM)
Depth With Door Open	66" (1,676 MM)
Width With Door Open	46" (1,168 MM)
Shipping Height	69" (1,753 MM)
Shipping Weight	1,045 LBS. (474 KG)
Operational Area	21.1 Square Feet (2 SQ M)

*\*Specifications Subject to Change*

