

## M42HD Vertical Baler





### The M42HD Vertical Baler is the Ideal Solution For:

- Convenience Stores
- Office Developments
- Hotels/Motels
- Hospitals/Nursing Homes
- Restaurants
- Department Stores
- Drug Stores

# When your workload is growing but your budget and available space is tight, you need the M42HD.

Compare these features of the M42HD with the competition:

- Small size with incredible strength and durability
- Will handle a variety of materials in the harshest of environments
- Fast 37 second cycle time
- Powerful 4½" cylinder with heavy-duty 3" rod for long life
- Energy efficient motor for low operation costs and long life

- Enclosed counterbalance for upper door lifting ease
- Optional locking or nonlocking casters for portable use
- Easy access to motor, pump and all control for general maintenance

The M42HD Vertical Baler, another great idea from Harmony Enterprises...The Undisputed Leader in Quality Manufacturing.





#### **Standard M42HD Features:**

- Control panel is UL® listed
- Four slots for tying bales
- Easy to service and maintain
- · Heavy-duty hydraulic ejection
- Turnbuckle lock on bale door for safety and opening ease
- Meets or exceeds all ANSI and OSHA safety standards










#### **M42HD Vertical Baler**

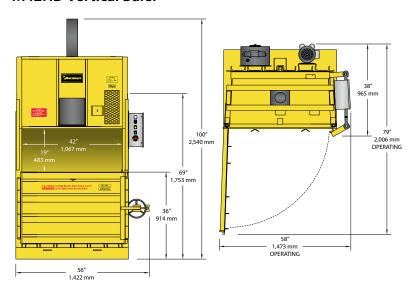

#### **SPECIFICATIONS**

| Bale Size                | 22" x 42" x up to 30"<br>(559 mm x 1,067 mm x up to 762 mm) |
|--------------------------|---|
| Bale Weight (corrugated) | up to 300 lbs. (136 kg)                                     |
| Ram Pressure             | 41,350 lbs. max (18,756 kg)                                 |
| Cycle Time               | 37 seconds  |
| Cylinder                 | 4.5" bore (114 mm)<br>3" rod (76 mm)<br>33" stoke (838 mm)  |
| Motor                    | 2 horsepower, 1,725 RPM, TEFC                               |
| Pump                     | Two-stage   |
| Electrical Power         | 115/230 volt, 1 phase, 60 hz                                |
| Bale Eject               | Hydraulic   |
| Bale Tying               | Strapping or polyethylene twine                             |

#### **DIMENSIONS**

| Loading Door Opening               | 19" x 42" (483 mm x 1,067 mm)    |
|------------------------------------|----------------------------------|
| Unloading Door Height              | 36" (914 mm)                     |
| Overall Height                     | 100" (2,540 mm)                  |
| Overall Depth                      | 38" (965 mm)                     |
| Overall Width                      | 56" (1,422 mm)                   |
| Depth with Door Open               | 79" (2,006 mm)                   |
| Width with Door Open               | 58" (1,473 mm)                   |
| Shipping Height                    | 69" (1,753 mm)                   |
| Shipping Weight                    | 1,850 lbs. (839 kg)              |
| Installation and<br>Operating Area | 32 square feet (3 square meters) |

Specifications subject to change without notice.