

M60MD



The M60MD Vertical Baler
is the Ideal Solution For:

- Shopping Centers
- Supermarkets
- Hotels/Motels
- Hospitals
- Industrial/Commercial Applications
- The Military
- Department Stores

See The Video At:

<https://youtu.be/dQYL4aNIO7E?t=1>



This space saving low profile workhorse operates under a standard ceiling.


Compare these features of the M60MD with the competition:

- Operates under an 8 foot ceiling height
- Rolls through any 3½' x 7' doorway
- This machine is ideal for baling and recycling cardboard, shrink wrap film and other recyclables
- Produces 700-800 pound corrugated bales

- Fast 33 second cycle time reduces your work time
- Shipped upright for easy unloading and placement at the work site
- Equipped with Harmony's Legion Box, which streamlines equipment controls, enhances real-time troubleshooting diagnostics, and optimizes the customer experience
- Cylinder safety cable standard on all M60MD models

The M60MD Vertical Baler, another great idea from Harmony Enterprises...*The Undisputed Leader in Quality Manufacturing.*

M60MD Low Profile Vertical Baler

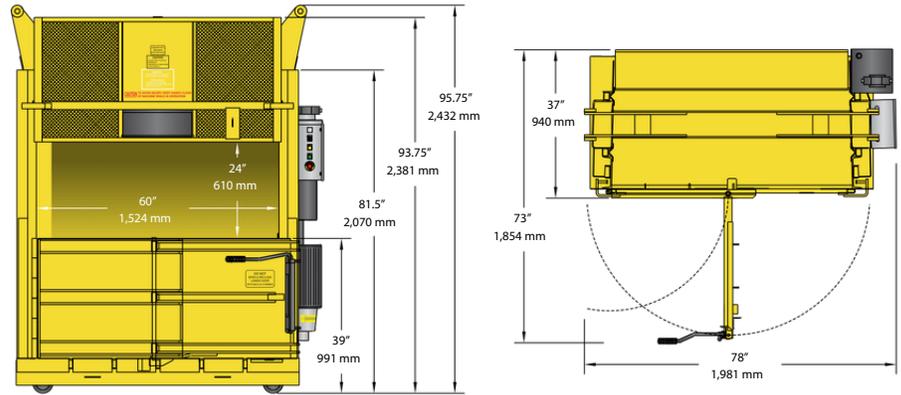

Standard M60MD Features:

- Control panel is UL® listed
- The operator loads, compacts, ties, and hydraulically ejects bales from the front of the machine, the compression cycle is fully automatic
- Physical durability is assured through solid construction
- Safety interlocks and shielding of all shear and pinch points makes the M60MD the safest 60" baler available today
- 5 horsepower motor for energy efficient operation
- Energy efficient two-stage pump provides maximum compaction pressure and rapid operating cycles with minimum horsepower
- Meets or exceeds all ANSI and OSHA safety standards



MODEL	M60MD
Specifications	
Bale Size	30" X 60" X ≤ 30" High (762 MM x 1,524 MM x 762 MM)
Bale Weight (OCC)	700-800 LBS. (318-363 KG)
Ram Force	57,805 LBS. (26,220 KG)
System Pressure	2,300 PSI
Cycle Time	33 Seconds
Electrical Power	208/230/460 Volt, 3 Phase, 60 HZ
Motor	5 HP - 3,450 RPM
Cylinder	Twin 4" Bore (102 MM) 32" Stroke (813 MM)
Pump	Two Stage
Bale Eject	Hydraulic
Bale Tying	Manual Wire, Twine, Strapping
Dimensions	
Loading Door Opening	24" X 60" (610 MM X 1,524 MM)
Unloading Door Height	39" (990 MM)
Operating Height	95.75" (2,439 MM)
Overall Depth	37" (940 MM)
Overall Width	78" (1,981 MM)
Depth With Door Open	73" (1,854 MM)
Shipping Height	81.5" (2,070 MM)
Shipping Weight	4,237 LBS. (1,922 KG)
Operational Area	39.5 SQ FT (3.7 SQ M)

**Specifications Subject To Change*

