



# M60STD

## Vertical Baler

The M60STD Vertical Baler is the Ideal Solution For:

- Recycling Centers
- Transfer Stations
- Super Markets
- Hotels/Motels
- Department Stores
- Manufacturing Facilities
- Colleges/Universities
- Military Bases
- Industrial/Commercial Sites
- Shopping Centers
- Hospitals

**Increase the efficiency of your waste disposal operations and boost your bottom line with Harmony Enterprises' M60STD Vertical Baler.**

Compare these features of the M60STD with the competition:

- Fast 52 second cycle time reduces your work time
- Heavy-duty 6" cylinder with 4" rod for extra long life
- Formidable 56,550 pounds of ram force
- Adjustable Bale Maximizer Timer for excellent bale quality.
- Cylinder safety cable standard on all M60STD models.


- Standard voltage disconnect included
- Full hinge construction on lower door and latch
- Bale full light and shutoff for consistent bale sizes
- Bale height adjustment selector

Harmony's M60STD is the versatile mill-sized baler that can handle a variety of commodities including aluminum, shrink wrap, plastic, paper, non-ferrous metal, and more!

The M60STD Vertical Baler, another great idea from Harmony Enterprises...*The Undisputed Leader in Quality Manufacturing.*



## M60STD Vertical Baler

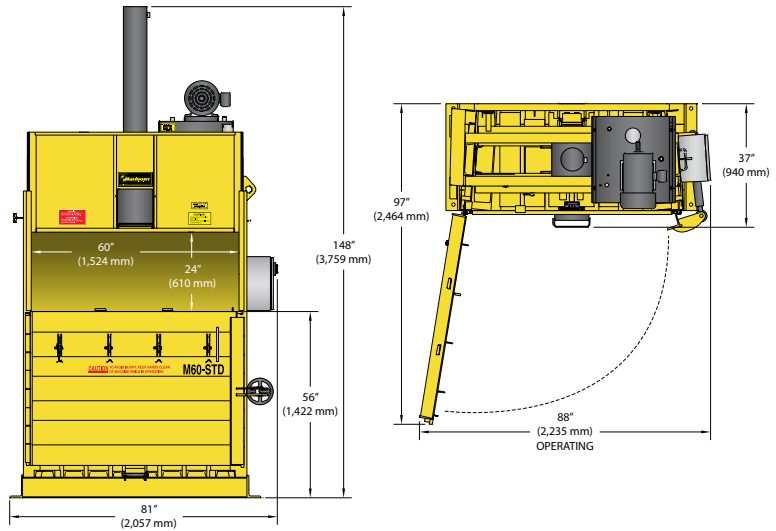

### Standard M60STD Features:

- Complete baler is ETL listed
- Powerful 6" cylinder with heavy-duty 4" rod for extra long life
- Full hinge construction on lower door and latch
- Enclosed counterbalance for upper door lifting ease
- Six slots for tying bales
- Heavy-duty motor and hydraulics for extra long life
- Meets or exceeds all ANSI and OSHA safety standards

### SPECIFICATIONS

Bale Size	30" x 60" x up to 51" (762 mm x 1,524 mm x up to 1,295 mm)
Bale Weight (corrugated)	up to 1,100 lbs. (499 kg)
Ram Pressure	56,550 lbs. (25,651 kg)
Cycle Time	52 seconds
Cylinder	6" bore (152 mm) 4" rod (102 mm) 48" stroke (1,219 mm)
Motor	10 horsepower
Pump	12 gallons per minute
Electrical Power	208/230/460 volt, 3 phase, 60 hz
Bale Eject	Hydraulic
Bale Tying	Wire or banding

### DIMENSIONS

Loading Door Opening	24" x 60" (610 mm x 1,524 mm)
Unloading Door Height	55" (1,397 mm)
Overall Height	148" (3,759 mm)
Overall Depth	37" (940 mm)
Overall Width	83" (2,108 mm)
Depth with Door Open	97" (2,464 mm)
Width with Door Open	88" (2,235 mm)
Shipping Height (on side with cylinder extended)	83" (2,108 mm)
Shipping Weight	4,500 lbs. (2,041 kg)
Installation and Operating Area	62.5 square feet (5.8 square meters)

Specifications subject to change without notice.



SAI GLOBAL  
ISO 9001  
Quality

Harmony Enterprises, Inc. 704 Main Avenue North Harmony, MN 55939 USA  
1.800.658.2320 toll free | 1.507.886.6666 international | 1.507.886.6706 fax  
Email us at [info@harmony1.com](mailto:info@harmony1.com) or visit us online at [www.harmony1.com](http://www.harmony1.com)

©2019 Harmony Enterprises, Inc. All rights reserved. Form HEI\_M60STD\_US 11/13 SC