



M60STD

Vertical 60" Baler



The M60STD Vertical Baler is the Ideal Solution For:

- Recycling Centers
- Transfer Stations
- Super Markets
- Hotels/Motels
- Department Stores
- Manufacturing Facilities
- Colleges/Universities
- Military Bases
- Industrial/Commercial Sites
- Shopping Centers
- Hospitals

See The Video At:
<https://youtu.be/yP0ncFl3Fqk>



Increase the efficiency of your waste disposal operations and boost your bottom line with Harmony Enterprises' M60STD Vertical Baler.

Compare these features of the M60STD with the competition:

- Fast 52 second cycle time reduces your work time
- Heavy duty 6" cylinder with 4" rod for extra long life
- Formidable 56,550 pounds of ram force
- Adjustable Bale Maximizer Timer for excellent bale quality.
- Cylinder safety cable standard on all M60STD models.




- Standard voltage disconnect included
- Full hinge construction on lower door and latch
- Bale full light and shutoff for consistent bale sizes
- Bale height adjustment selector

Harmony's M60STD is the versatile mill-sized baler that can handle a variety of commodities including aluminum, shrink wrap, plastic, paper, non-ferrous metal, and more!

The M60STD Vertical Baler, another great idea from Harmony Enterprises...*The Undisputed Leader in Quality Manufacturing.*

M60STD Vertical Baler

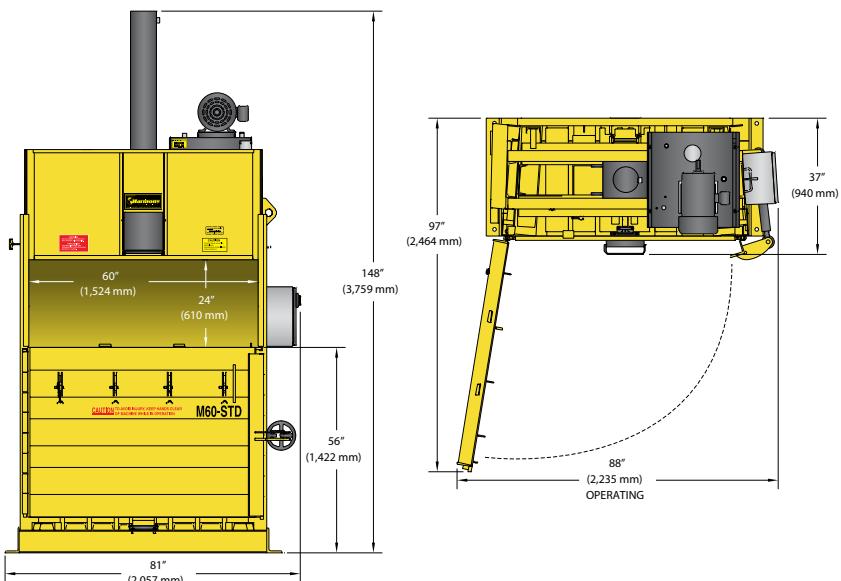

Standard M60STD Features:

- Complete baler is ETL listed
- Powerful 6" cylinder with heavy-duty 4" rod for extra long life
- Full hinge construction on lower door and latch
- Enclosed counterbalance for upper door lifting ease
- Six slots for tying bales
- Heavy-duty motor and hydraulics for extra long life
- Meets or exceeds all ANSI and OSHA safety standards



| MODEL | M60STD |
|---------------------------|--|
| Specifications | |
| Bale Size | 30" X 60" X ≤ 51" High |
| Bale Weight (OCC) | Up To 1,100 LBS. (499 KG) |
| Ram Force | 56,550 LBS. (25,651 KG) |
| Cycle Time | 52 Seconds |
| Electrical Power | 208/230/460 Volt, 3 Phase, 60 HZ |
| Motor | 10 HP |
| Cylinder | 6" Bore (152 MM) 4" Rod (102 MM) 48" Stroke (1,219 MM) |
| Pump | 12 Gallons Per Minute |
| Bale Eject | Hydraulic |
| Bale Tying | Manual Wire Or Banding |
| Dimensions | |
| Loading Door Opening | 24" X 60" (610 MM X 1,524 MM) |
| Unloading Door Height | 55" (1,397 MM) |
| Overall Height | 148" (3,579 MM) |
| Overall Depth | 37" (940 MM) |
| Overall Width | 83" (2,108 MM) |
| Depth With Door Open | 97" (2,464 MM) |
| Width With Door Open | 88" (2,235 MM) |
| Shipping Height (On Side) | 83" (2,108 MM) |
| Shipping Weight | 4,500 LBS. (2,041 KG) |
| Operational Area | 62.5 Square Feet |

*Specifications Subject To Change

