



# S60XD

## Heavy Duty Vertical Baler

The S60XD Vertical Baler is the Ideal Solution For:

- Recycling Centers
- Transfer Stations
- Super Markets
- Hotels/Motels
- Department Stores
- Manufacturing Facilities
- Colleges/Universities
- Military Bases
- Industrial/Commercial Sites
- Shopping Centers
- Hospitals

**Increase the efficiency of your waste disposal operations and boost your bottom line with Harmony Enterprises' S60XD Vertical Baler.**

Compare these features of the S60XD with the competition:

- Fast cycle time reduces your work time
- Heavy duty 7" cylinder with extra long 64" stroke.
- Formidable 92,360 pounds of ram force
- Adjustable Bale Maximizer Timer for excellent bale quality
- Standard retractable bale dogs for maximum material containment


- Standard voltage disconnect included
- Full hinge construction on lower door and latch
- Bale full light and shutoff for consistent bale sizes
- Bale height adjustment selector
- Oil cooler standard

The S60XD Vertical Baler, another great idea from Harmony Enterprises...*The Solutions Provider For Waste Handling & Recycling!*





## S60XD Heavy Duty Vertical Baler

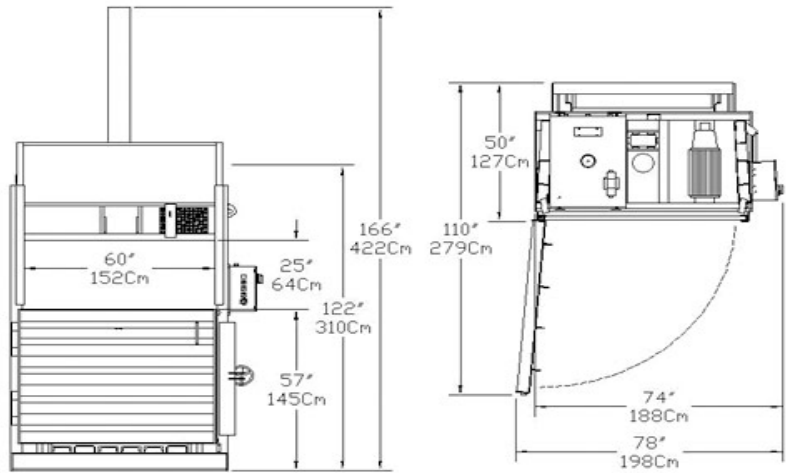

### Standard S60XD Features:

- Complete baler is UL® listed
- Powerful 7" cylinder with extra long 64" stroke
- Standard retractable bale dogs for maximum material containment
- Full hinge construction on lower door and latch
- Enclosed counterbalance for upper door lifting ease
- Six slots for tying bales
- Heavy-duty motor and hydraulics for extra long life
- Meets or exceeds all ANSI and OSHA safety standards

### Bale Weights Produced by S60XD:

- OCC: 900-1000 lbs.
- PET Bottles: 500-550 lbs.
- Aluminum Cans: 350-450 lbs.

### SPECIFICATIONS

Bale Size	30" x 60" x up to 48" (76 cm x 152 cm x 122 cm)
Bale Weight	up to 1,000 lbs. Corrugated (454 kg)
Ram Pressure	92,360 lbs (41,894 Kg)
Cycle Time	39 seconds
Cylinder	7" bore 4.5" rod 64" stroke
Motor	20 horsepower, 1,750 rpm, TEFC
Pump	16 gallons per minute
Electrical Power	208/230/460 volt, 3 phase, 60 hz
Bale Eject	Hydraulic
Bale Tying	Wire or Polyethylene Twine

### DIMENSIONS

Loading Door Opening	25" x 60" (64 x 152cm)
Unloading Door Height	57" (145 cm)
Overall Height	166" (422 cm)
Overall Depth	50" (127 cm)
Overall Width	83" (211 cm)
Depth with Door Open	109.5" (278 cm)
Width with Door Open	88.5" (225 cm)
Shipping Height (on side with cylinder extended)	83" (211 cm)
Shipping Weight	6,600 lbs. (2,994 kg)
Installation and Operating Area	68.0 square feet (6.32 square meters)

Specifications subject to change without notice.



Harmony Enterprises, Inc. 704 Main Avenue North Harmony, MN 55939 USA  
 1.800.658.2320 toll free | 1.507.886.6666 international | 1.507.886.6706 fax  
 Email us at [info@harmony1.com](mailto:info@harmony1.com) or visit us online at [www.harmony1.com](http://www.harmony1.com)