



VC100

Vertical Compactor

The VC100 Vertical Compactor is the Ideal Solution For:

- Manufacturing & Industrial Facilities
- Hotels
- Distribution Centers
- Restaurants
- Hospitals
- Retail Stores
- Convenience Stores





Compare These Key Features With The Competition:

- Keylock controls prevent unsafe and unauthorized operation.
- Compaction pressure is held until the next time you are ready to load, ensuring maximum use of space.
- 28,274 lbs of maximum ram force at 2000 PSI.
- Powerful twin 3" Cylinders.
- Powerful and efficient downstroke compaction.
- Innovative design allows it to be ground or chute fed from any angle.
- Available with 2, 4, or 6 Cu. Yard Containers.
- Automatic closing plate to eliminate trash piling up on top of ram.
- Fast 26 second cycle time.
- 4:1 Compaction Ratio
- Indicator Lights For Containers To Assist Haulers.
- Safety switches disable the machine when the loading door is open, preventing injury.
- Remote pendant for easy operation.



VC100 Vertical Compactor

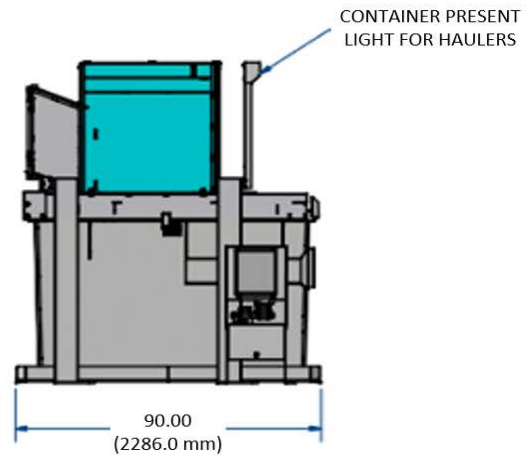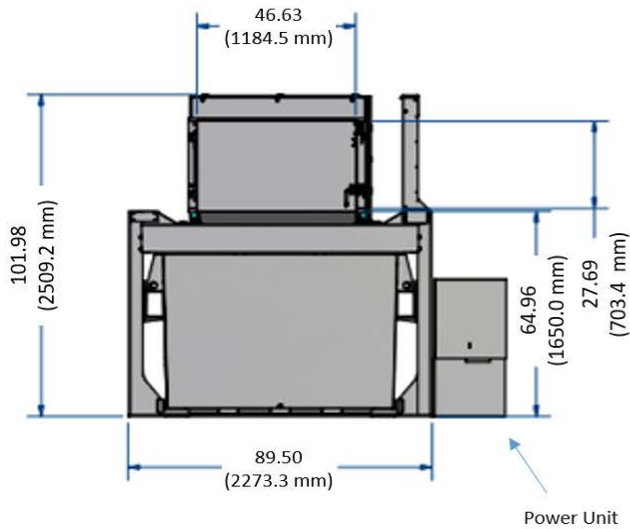

SPECIFICATIONS

Container Capacity	2, 4, or 6 cubic yards
Ram Force	28,274 # ram force at 2000 PSI
Cycle Time	26 seconds
Cylinders	Powerful Twin Cylinders 3" (76 mm) x 2 3.00" (413 mm) Stroke
Motor	2 horsepower, TEFC
Pump	Two-stage
Electrical Power	208/220/460 Volt 3 Phase

DIMENSIONS

Loading Door Opening	27.69" x 46.63" (703 mm x 1,185 mm)
Container Heights 4yd-6 yd	39" (991 mm) - 64.96" (1,650 mm)
Overall Height	74.82" (1,900 mm), 86.57" (2,298 mm), 101.98" (2,590 mm)
Overall Width	89.5" (2,273 mm)
Overall Depth	90.00" (2,286 mm)
Loading Height	38.25" (997 mm), 51" (1,295 mm), 65" (1,651 mm)
Ram Face	44.63" (1,134 mm) x 33.75" (857 mm)
Oil Reservoir Capacity	12.5 Gallons

Specifications subject to change without notice.



Standard VC100 Features:

- All controls are UL® listed
- Heavy-duty motor and hydraulics for extra long life
- Meets or exceeds all ANSI and OSHA safety standards
- Indicator Lights For Containers To Assist Haulers.
- Optional Sized Containers To Fit Your Specific Needs.



Harmony Enterprises, Inc. 704 Main Avenue North Harmony, MN 55939 USA
 1.800.658.2320 toll free | 1.507.886.6666 international | 1.507.886.6706 fax
 Email us at info@harmony1.com or visit us online at www.harmony1.com

©2019 Harmony Enterprises, Inc. All rights reserved. Form HEI_P200_US 07/09 SC





VC100

Chute-Fed Vertical Compactor

The VC100 Vertical Compactor is the Ideal Solution For:

- Manufacturing & Industrial Facilities
- Hotels
- Distribution Centers
- Restaurants
- Hospitals
- Retail Stores
- Convenience Stores




Compare These Key Features With The Competition:

- Keylock controls prevent unsafe and unauthorized operation.
- Compaction pressure is held until the next time you are ready to load, ensuring maximum use of space.
- 28,274 lbs of maximum ram force at 2000 PSI.
- Powerful twin 3" Cylinders.
- Powerful and efficient downstroke compaction.
- Innovative design allows it to be ground or chute fed from any angle.
- Available with 2, 4, or 6 Cu. Yard Containers.
- Automatic closing plate to eliminate trash piling up on top of ram.
- Fast 26 second cycle time.
- 4:1 Compaction Ratio
- Indicator Lights For Containers To Assist Haulers.
- Safety switches disable the machine when the loading door is open, preventing injury.
- Remote pendant for easy operation.



VC100 Vertical Chute Fed Compactor

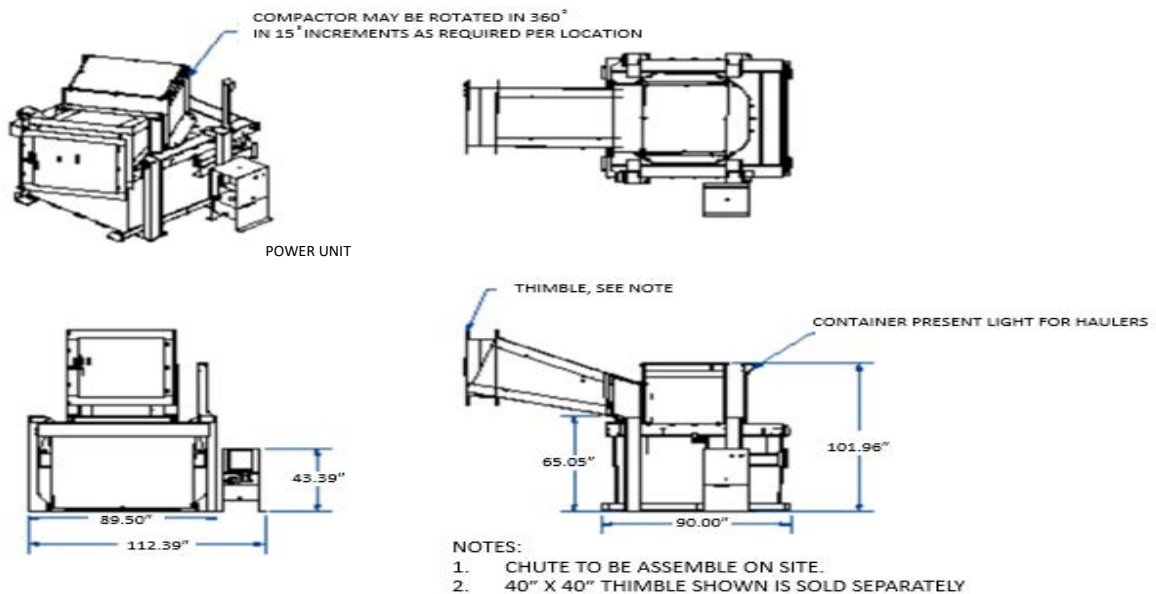

SPECIFICATION:

Container Capacity	2, 4, or 6 cubic yards
Ram Force	28,274 # ram force at 2000 PSI
Cycle Time	26 seconds
Cylinders	Powerful Twin Cylinders 3" (76 mm) x 2 3.00" (413 mm) Stroke
Motor	2 horsepower, TEFC
Pump	Two-stage
Electrical Power	208/220/460 Volt 3 Phase

DIMENSIONS

Loading Door Opening	27.69"x 46.63" (703 mm x 1,185 mm)
Container Heights 4yd-6 yd	39" (991 mm) - 64.96" (1,650 mm)
Overall Height	74.82" (1,900 mm), 86.57" (2,298 mm), 101.98" (2,590 mm)
Overall Width	89.5" (2,273 mm)
Overall Depth	90.00" (2,286 mm)
Loading Height	38.25" (997 mm), 51" (1,295 mm), 65" (1,651 mm)
Ram Face	44.63" (1,134 mm) x 33.75" (857 mm)
Oil Reservoir Capacity	12.5 Gallons

Specifications subject to change without notice.



Standard VC100 Features:

- All controls are UL® listed
- Heavy-duty motor and hydraulics for extra long life
- Meets or exceeds all ANSI and OSHA safety standards
- Indicator Lights For Containers To Assist Haulers.
- Optional Sized Containers To Fit Your Specific Needs.



Harmony Enterprises, Inc. 704 Main Avenue North Harmony, MN 55939 USA
1.800.658.2320 toll free | 1.507.886.6666 international | 1.507.886.6706 fax
Email us at info@harmony1.com or visit us online at www.harmony1.com

©2019 Harmony Enterprises, Inc. All rights reserved. Form HEI_P200_US 07/09 SC

